


Nylon Waterproof Cable Gland PG Type

- **Thread:** PG
- **Materials:** Part A.C.F is made of UL approved nylon PA66(fire rating UL94V-2),part B.D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range,0 type was her will be used in tightening part)
- **Working Temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃
- **Product Features:**Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to acid and alkali, alcohol, grease and general solvents
- **Color:** Light grey(RAL7035), black(RAL9005), other color can be customized according to request




Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm) 
PG7	3-6.5	12.5	8	18/17
PG7	3-6.5	12.5	8	18/17
PG9	4-8	15.2	8	22/19
PG9	2-6	15.2	8	22/19
PG11	5-10	18.6	9	24/22
PG11	3-7	18.6	9	24/22
PG13.5	6-12	20.4	10	27/24
PG13.5	5-9	20.4	10	27/24
PG16	10-14	22.5	10	30/27
PG16	8-12	22.5	10	30/27
PG19	12-16	24	10	30/27
PG19	10-14	24	10	30/27
PG21	13-18	28.3	10	36/33
PG21	9-16	28.3	10	36/33
PG25	16-21	30	11	37/36
PG25	13-18	30	11	37/36
PG29	18-25	37	12	46/42
PG29	13-20	37	12	46/42
PG36	22-32	47	14	58/52
PG36	20-26	47	14	58/52
PG42	32-40	54	14	64/60
PG42	25-31	54	14	64/60
PG48	37-44	59.3	14.5	70/64
PG48	29-35	59.3	14.5	70/64
PG63	42-50	71	28	82/77
PG63	32-40	71	28	82/77

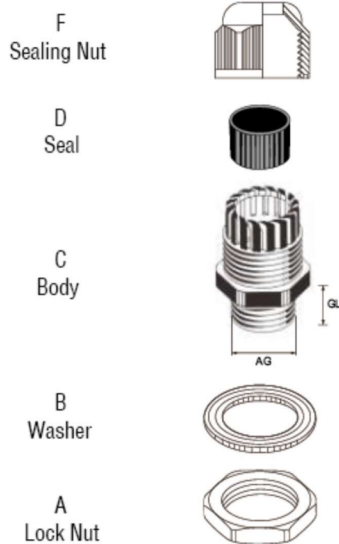

Nylon Waterproof Cable Gland Metric Type

- **Thread:** Metric
- **Materials:** Part A.C.F is made of UL approved nylon PA66(fire rating UL94V-2),part B.D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range,0 type was her will be used in tightening part)
- **Working Temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃
- **Product Features:**Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to acid and alkali, alcohol, grease and general solvents
- **Color:** Light grey(RAL7035), black(RAL9005), other color can be customized according to request

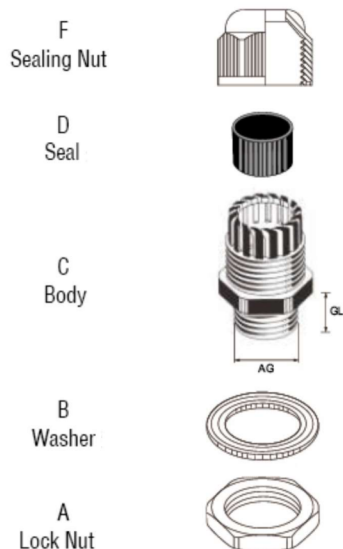


Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm)
M12X1.5	3-6.5	12	8	18/17
M12X1.5	2-5	12	8	18/17
M12X1.5	4-8	12	8	18/19
M12X1.5	2-6	12	8	18/19
M16X1.5	4-8	16	8	22/19
M16X1.5	2-6	16	8	22/19
M16X1.5	5-10	16	9	22/22
M16X1.5	3-7	16	9	22/22
M18X1.5	5-10	18	9	24/22
M18X1.5	3-7	18	9	24/22
M20X1.5	6-12	20	10	27/24
M20X1.5	5-9	20	10	27/24
M20X1.5	10-14	20	10	27/27
M20X1.5	8-12	20	10	27/27
M22X1.5	10-14	22	10	30/27
M22X1.5	8-12	22	10	30/27
M24X1.5	12-16	24	10	30/27
M24X1.5	10-14	24	10	30/27
M25X1.5	13-18	25	10	33/33
M25X1.5	9-16	25	10	33/33
M27X1.5	13-18	27	10	36/33
M27X1.5	9-16	27	10	36/33
M30X1.5	16-20	30	11	37/36
M30X1.5	13-18	30	11	37/36
M32X1.5	16-20	32	11	40/35
M32X1.5	13-18	32	11	40/35
M32X1.5	18-25	32	13	40/42
M32X1.5	13-20	32	13	40/42
M36X1.5	18-25	36	12	46/42
M36X1.5	13-20	36	12	46/42
M40X1.5	22-32	40	15	50/52
M40X1.5	20-26	40	15	50/52
M50X1.5	32-40	50	15	62/60
M50X1.5	25-31	50	15	62/60
M63X1.5	37-44	63	15	75/68
M63X1.5	29-35	63	15	75/68



Nylon Waterproof Cable Gland Long Thread PG Type

- **Thread:** PG
- **Materials:** Part A.C.F is made of UL approved nylon PA66 (fire rating UL94V-2), part B.D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range, 0 type was her will be used in tightening part)
- **Working Temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃
- **Product Features:** Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to acid and alkali, alcohol, grease and general solvents
- **Color:** Light grey (RAL7035), black (RAL9005), other color can be customized according to request

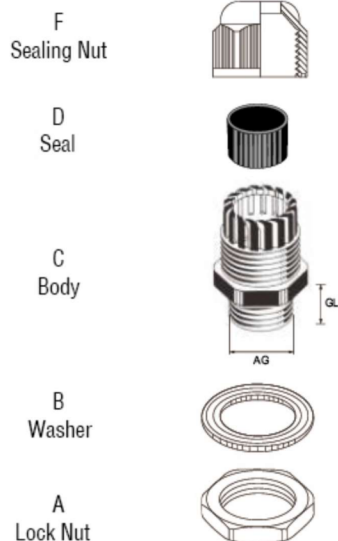


Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm) 
PG7	3-6.5	12.5	15	18/17
PG7	2-5	12.5	15	18/17
PG9	4-8	15.2	15	22/19
PG9	2-6	15.2	15	22/19
PG11	5-10	18.6	15	24/22
PG11	3-7	18.6	15	24/22
PG13.5	6-12	20.4	15	27/24
PG13.5	5-9	20.4	15	27/24
PG16	10-14	22.5	15	30/27
PG16	8-12	22.5	15	30/27
PG19	12-16	24	15	30/27
PG19	10-14	24	15	30/27
PG21	13-18	28.3	15	36/33
PG21	9-16	28.3	15	36/33
PG25	16-21	30	15	37/36
PG25	13-18	30	15	37/36
PG29	18-25	37	18	46/42
PG29	13-20	37	18	46/42
PG36	22-32	47	18	58/52
PG36	20-26	47	18	58/52
PG42	32-40	54	18	64/60
PG42	25-31	54	18	64/60
PG48	37-44	59.3	18	70/64
PG48	29-35	59.3	18	70/64
PG63	42-50	71	28	82/77
PG63	32-40	71	28	82/77



Nylon Waterproof Cable Gland Long Thread Metric Type

- **Thread:** Metric
- **Materials:** Part A,C,F is made of UL approved nylon PA66(fire rating UL94V-2),part B,D butadiene rubber (NBR) or EPDM
- **Protection Degree:** IP68 (within fastening range,0 type was her will be used in tightening part)
- **Working Temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃
- **Product Features:**Wide range for fastening cables, strong tensile strength, waterproof, dustproof, resistant to a cid and alkali, alcohol, grease and general solvents
- **Color:** Light grey(RAL7035), black(RAL9005), other color can be customized according to request

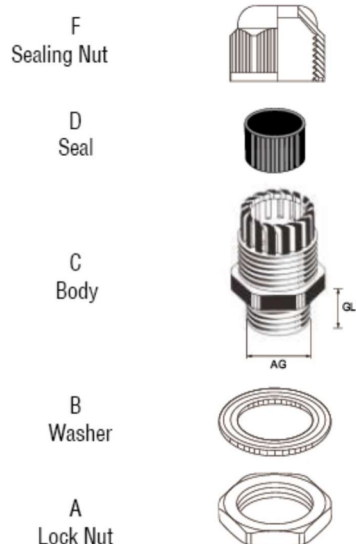

Model	Cable Range (mm)	Thread O. D. AG (mm)	Thread Length GL (mm)	Spanner Size (mm) 
M12X1.5	3-6.5	12	15	18/17
M12X1.5	2-5	12	15	18/17
M12X1.5	4-8	12	15	18/19
M12X1.5	2-6	12	15	18/19
M16X1.5	4-8	16	15	22/19
M16X1.5	2-6	16	15	22/19
M16X1.5	5-10	16	15	22/22
M16X1.5	3-7	16	15	22/22
M18X1.5	5-10	18	15	24/22
M18X1.5	3-7	18	15	24/22
M20X1.5	6-12	20	15	27/24
M20X1.5	5-9	20	15	27/24
M20X1.5	10-14	20	15	27/27
M20X1.5	8-12	20	15	27/27
M22X1.5	10-14	22	15	30/27
M22X1.5	8-12	22	15	30/27
M24X1.5	12-16	24	15	30/27
M24X1.5	10-14	24	15	30/27
M25X1.5	13-18	25	15	33/33
M25X1.5	9-16	25	15	33/33
M27X1.5	13-18	27	15	36/33
M27X1.5	9-16	27	15	36/33
M30X1.5	16-20	30	15	37/36
M30X1.5	13-18	30	15	37/36
M32X1.5	16-20	32	15	40/35
M32X1.5	13-18	32	15	40/35
M32X1.5	18-25	32	16	40/42
M32X1.5	13-20	32	16	40/42
M36X1.5	18-25	36	18	46/42
M36X1.5	13-20	36	18	46/42
M40X1.5	22-32	40	18	50/52
M40X1.5	20-26	40	18	50/52
M50X1.5	32-40	50	18	62/60
M50X1.5	25-31	50	18	62/60
M63X1.5	37-44	63	18	75/68
M63X1.5	29-35	63	18	75/68

